


Type:RUM-6639

產品圖 Product Drawing

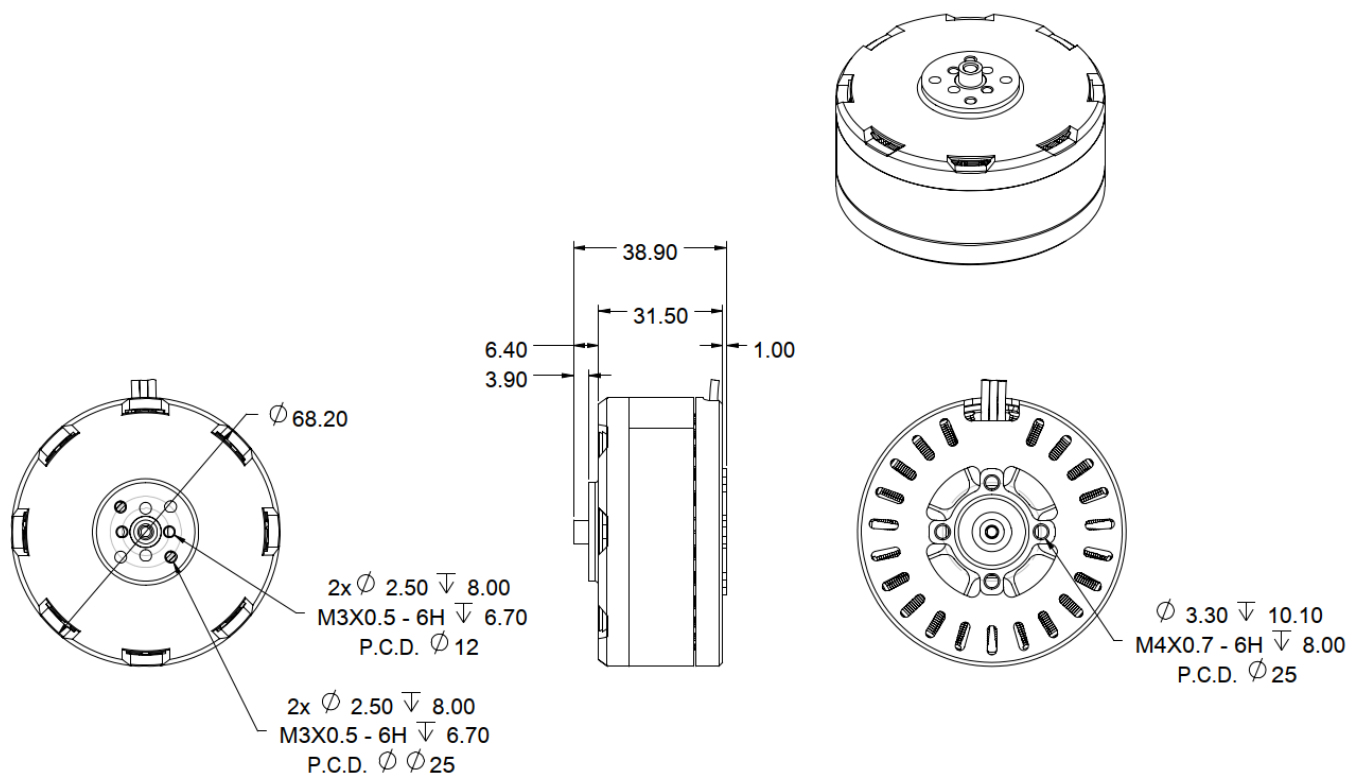

規格 Specifications

無刷馬達之參數	符號	公差	單位	值
Configuration	N/A	NOM.	N/A	24N28P
Motor Size	N/A	NOM.	mm	$\phi 66*39.1$
Permissinle Winding TEMP	N/A	MAX.	°C	150
KV Value	Kv	NOM.	RPM/VOLTS	210
Peak Current	I _p	MAX.	AMPS	70A/Continuous 180S
Power	P _o	MAX.	WATTS	3200W/ Continuous 180S
Internal Resistance	R	MAX.	Ω	0.048
Volts at peal torque	V _p	NOM.	VOLTS	42-52
Motor Weight	N/A	MAX.	G	340
ESC Recommendation	N/A	NOM.	N/A	FLAME 80A 12S V2.0
Propeller Recommendation	N/A	NOM.	mm	V22*7.4
Cable Length	N/A	NOM.	N/A	600

測試報告 Test Report

Current(A)	RPM	Thrust(KG)	Voltage(V)	EFF(G/W)
7.2	3354	2.9	49.05	8.21
10.3	3852	3.9	48.93	7.74
18	4644	5.76	48.73	6.57
28.1	5364	7.75	48.46	5.69
38.7	5855	9.3	48.16	4.99
68.3	6912	13.1	47.45	4.04